# MINI USB A TYPE FEMALE (SMT) 4 PIN

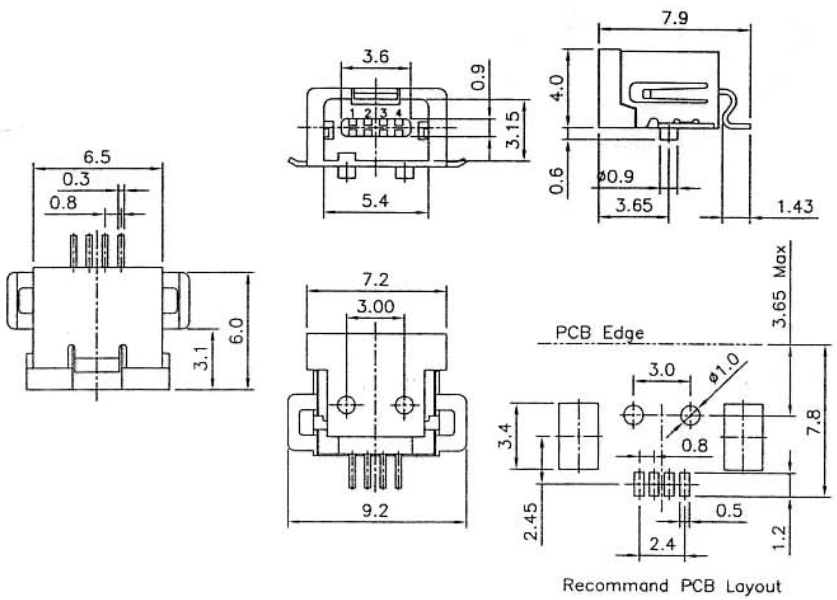


Recommand PCB Layout

SPECIFICATIONS:

CURRENT RATING 0.5A AC/DC
WITHDRAWING VOLTAGE 500V AC/MINUTE
INSULATION RESISTANCE 1000M OHM MIN
TEMPERATURE RANGE -25C TO +105C
CONTACT RESISTANCE 50m OHM MAX

MATERIAL

SHELL - SUS 301 1/2H TIN PLATED
HOUSING - LCP UL94V-0
TERMINAL - PHOSPHOR BRONZE

PACKING
1000PCS/BAG

| DRAWN BY | DESIGNED BY | UNIT | SCALE | TOLERANCE |
|---|---|---|---|---|
| | | mm | | ±0.25 |
| CHECKED BY | APPROVED BY | DATE | VER NO. | |
| | | 06-20-01 | A | |

OWL ELECTRONICS LIMITED

PART NO.

ST 3104AFS