



## BOX HEADER PITCH=2.54MM

STRAIGHT  
BH 1100S-

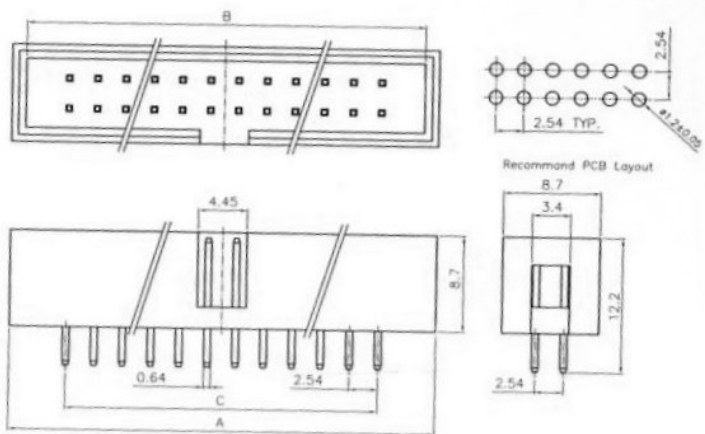

RIGHT ANGLE  
BH 1100R-

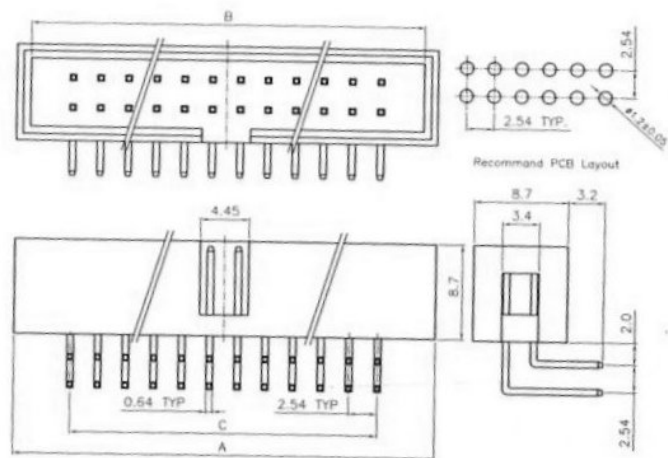

## SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC  
CURRENT RATING: 3A AC/DC  
WITHSTANDING VOLTAGE: 1000V AC/MINUTE  
INSULATION RESISTANCE: 1000M OHM MIN  
TEMPERATURE RANGE: -40C TO +105C  
CONTACT RESISTANCE: 20m OHM MAX

## MATERIAL

CONTACT: BRASS, GOLD PLATED  
BASE: PBT UL94V-0

Poles	Dimensions (mm)		
	A	B	C
6	15.124	12.94	5.08
8	17.78	15.48	7.62
10	20.32	18.02	10.16
12	22.86	20.56	12.70
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
44	63.50	61.20	53.34
50	71.12	68.82	60.96
60	83.82	81.52	73.66
64	88.90	86.60	78.74

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				BH 1100S- BH 1100R-