



**MALE**

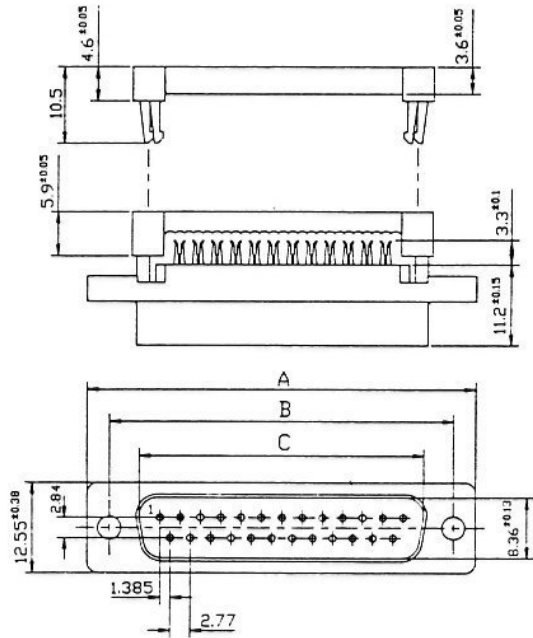

**FEMALE**

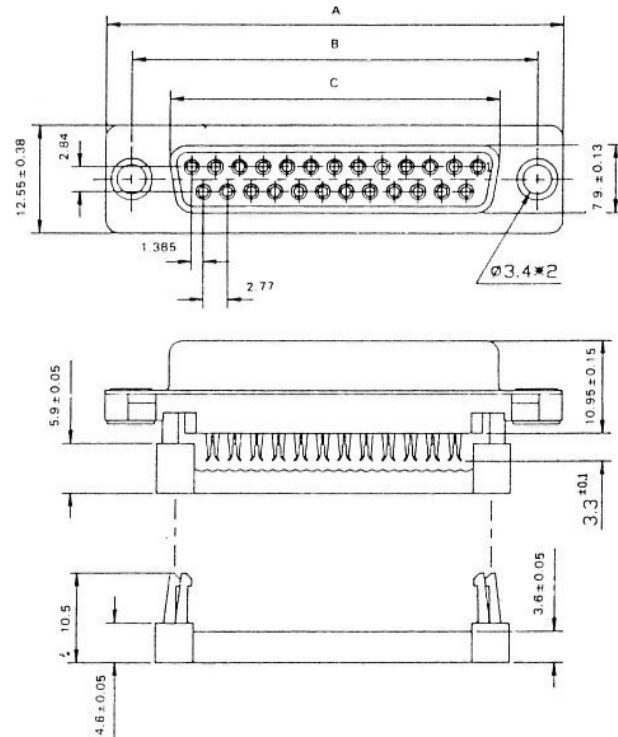

**MATERIAL**

Contact: Phosphor Bronze  
 Insulator: PBT+30% Glass Fiber (UL 94V-0)  
 Color: Black Blue, Gray  
 Contact Plated: Gold Over Nickel, or Tin  
 Contact Finish: Gold Over Nickel  
 DML Terminal Finish: Tin-lead Over Nickel

**SPECIFICATION**

Current Rate: 1A  
 Contact Resistance: 20MΩ Min. at DC 500V  
 Insulation Resistance: 1000MΩ Min. at 500V DC  
 Voltage: 500V AC for one minute  
 Wire Size, Flat Cable for 1 DC: 1.27mm (0.05") spacing  
 AWG #28 (Standed) or #30 (Solid)

**D-SUB IDC TYPE**

DIMENSION	A ± 0.38	B ± 0.13	C ± 0.13
DB 1522M-9	30.81	24.99	16.92
DB 1522M-15	39.14	33.32	25.25
DB 1522M-25	53.04	47.04	38.96

DIMENSION	A ± 0.38	B ± 0.13	C ± 0.13
DB 1522F-9	30.81	24.99	16.33
DB 1522F-15	39.14	33.32	24.66
DB 1522F-25	53.04	47.04	38.38

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		06-20-01	A	
<b>OWL ELECTRONICS LIMITED</b>				PART NO.
				<b>DB 1522</b>