


FFC CONNECTOR PITCH=1.25MM NON ZIF SINGLE CONTACT

STRAIGHT
FF 8079S-

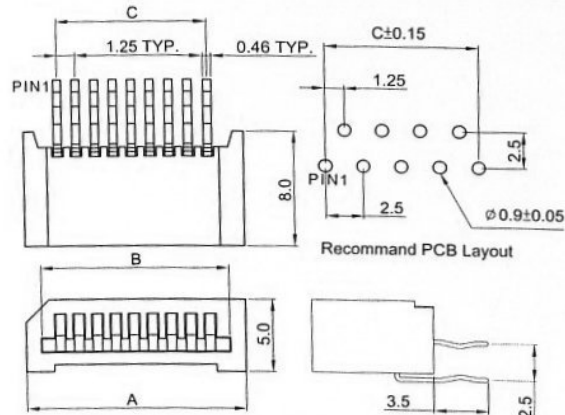

Poles	Dimensions (mm)		
	A	B	C
4	8.55	6.40	3.75
5	9.80	7.65	5.00
6	11.05	8.90	6.25
7	12.30	10.15	7.50
8	13.55	11.40	8.75
9	14.80	12.65	10.00
10	16.05	13.90	11.25
11	17.30	15.15	12.50
12	18.55	16.40	13.75
13	19.80	17.65	15.00
14	21.05	18.90	16.25
15	22.30	20.15	17.50
16	23.55	21.40	18.75
17	24.80	22.65	20.00
18	26.05	23.90	21.25
19	27.30	25.15	22.50
20	28.55	26.40	23.75
21	29.80	27.65	25.00
22	31.05	28.90	26.25
23	32.30	30.15	27.50
24	33.55	31.40	28.75
25	34.80	32.65	30.00
26	36.05	33.90	31.25
27	37.30	35.15	32.50
28	38.55	36.40	33.75
29	39.80	37.65	35.00
30	41.05	38.90	36.25


SPECIFICATIONS

VOLTAGE RATING: 125V AC/DC
 CURRENT RATING: 1A AC/DC
 WITHSTANDING VOLTAGE: 500V AC/MINUTE
 INSULATION RESISTANCE: 100M OHM MIN
 TEMPERATURE RANGE: -20C TO 85C
 CONTACT RESISTANCE: 20m OHM max

MATERIAL

CONTACT: PHOSPHOR BRONZE, TIN PLATED
 BASE: PPS UL94V-0

RIGHT ANGLE
FF 8079R

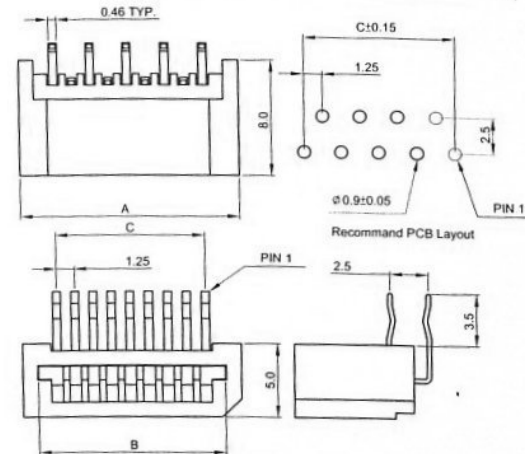

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		25 MAR 04		PART NO.
OWL ELECTRONICS LIMITED				FF 8079S FF 8079R