


IC SOCKET (MACHINED) PITCH=2.54MM

SINGLE ROW

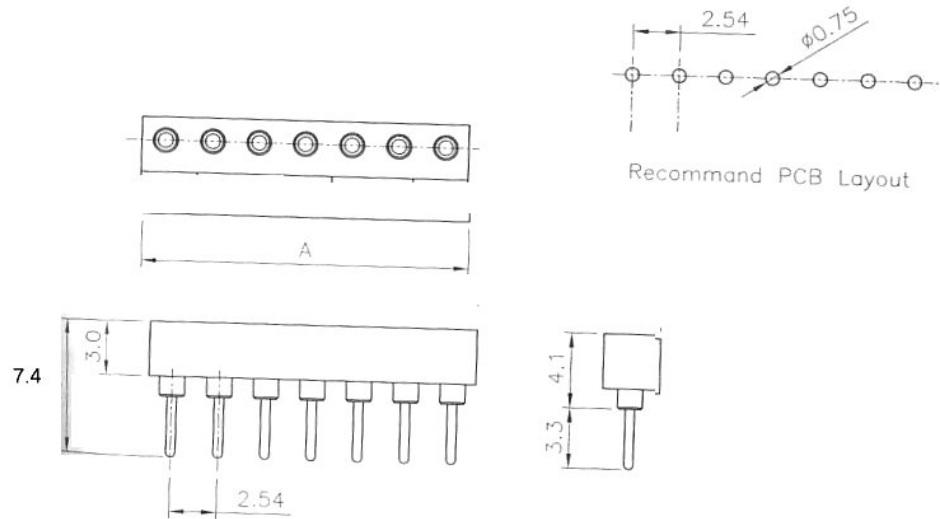

POLES	A
6	7.62
8	10.16
14	17.78
16	20.32
18	22.86
20	25.40
22	27.94
24	30.48
28	35.56
32	40.64
40	50.80
42	53.34
48	60.96

SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC
 CURRENT RATING: 1A AC/DC
 WITHSTANDING VOLTAGE: 1000V AC/MINUTE
 INSULATION RESISTANCE: 1000M OHM min
 TEMPERATURE RANGE: -40C to +105C
 CONTACT RESISTANCE: 20m OHM max

MATERIAL

CONTACT: PHOSPHOR BRONZE TIN PLATED
 BASE: PBT UL94V-0

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		±0.25
CHECKED BY	APPROVED BY	DATE	VER NO.	
		06-20-01	A	
OWL ELECTRONICS LIMITED				PART NO.
				IC 3500S