
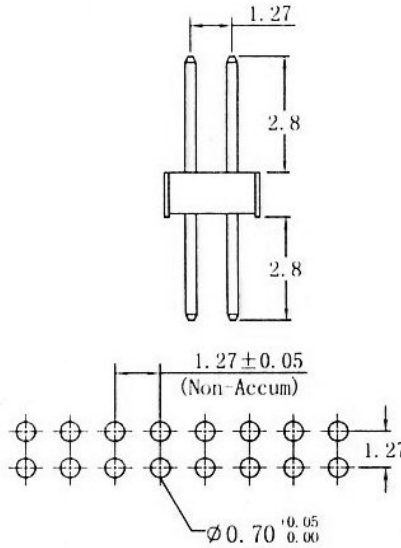


# PIN HEADER PITCH=1.27MM DOUBLE ROW

DOUBLE ROW  
STRAIGHT  
PH 5002S-

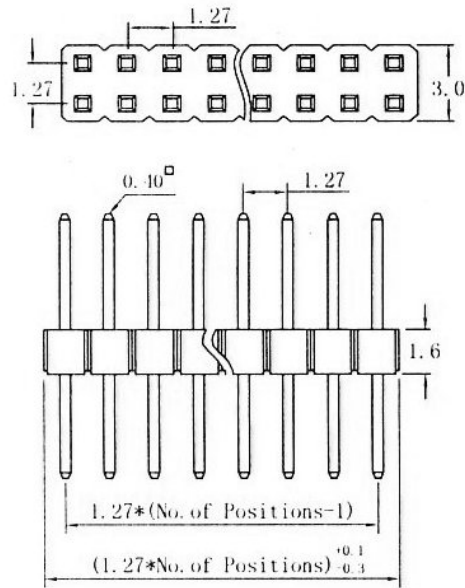

Recommended P. C. B Layout



## SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC  
CURRENT RATING: 3A AC/DC  
WITHSTANDING VOLTAGE: 1000V AC/MINUTES  
INSULATION RESISTANCE: 1000M OHM MIN  
TEMPERATURE RANGE: -25C TO + 85C  
CONTACT RESISTANCE: 20m OHM MAX


## MATERIAL

CONTACT: BRASS, GOLD PLATED  
BASE: PBT UL94V-0

DOUBLE ROW  
RIGHT ANGLE  
PH 5002R-

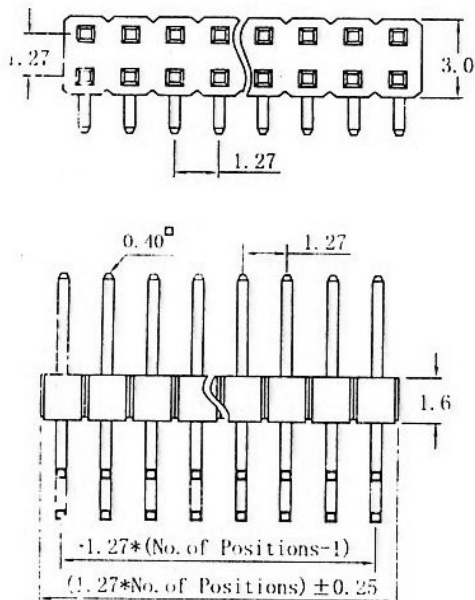

Recommended P. C. B Layout



DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				PH 5002S- PH 5002R-