




# PIN HEADER PITCH=1.0MM DOUBLE ROW STRAIGHT

## SPECIFICATIONS

VOLTAGE RATING: 250V AC/DC  
 CURRENT RATING: 3A AC/DC  
 WITHSTANDING VOLTAGE: 1000V AC/MINUTES  
 INSULATION RESISTANCE: 1000M OHM MIN  
 TEMPERATURE RANGE: -25C TO + 85C  
 CONTACT RESISTANCE: 20m OHM MAX

## MATERIAL

CONTACT: BRASS, GOLD PLATED  
 BASE: PBT UL94V-0

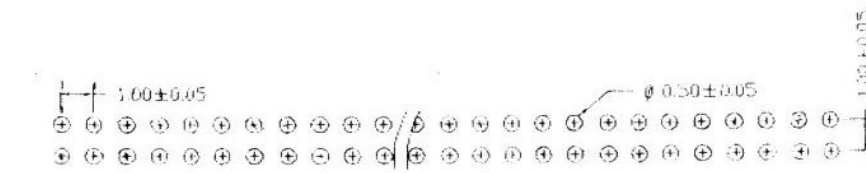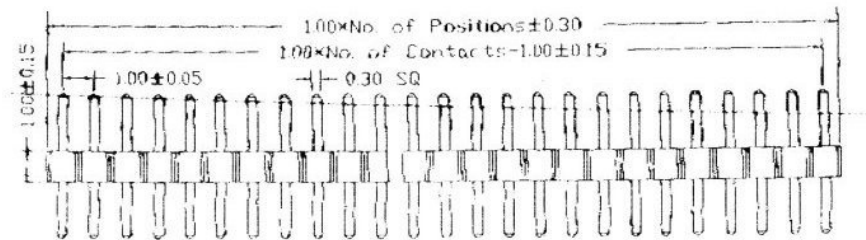

P. C. B LAYOUT

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
		mm		+/- 0.2MM
CHECKED BY	APPROVED BY	DATE	VER. NO.	
		25 MAR 04		
OWL ELECTRONICS LIMITED				PART NO.
				PH 6001S-