


**SINGLE ROW
STRAIGHT
PS 1800S-**

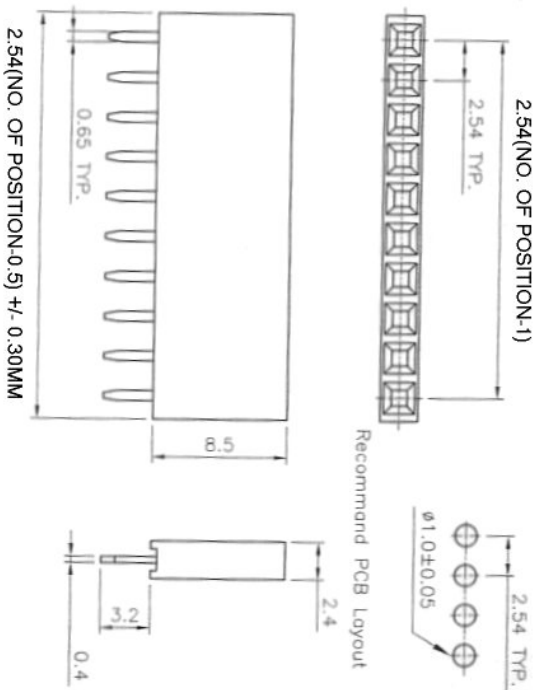


Recommend PCB Layout

SPECIFICATIONS:

CURRENT RATING: 1A AC/DC
 WITHSTANDING VOLTAGE: 500V AC/MINUTE
 INSULATION RESISTANCE: 5000M OHM MIN
 TEMPERATURE RANGE: -40C TO 105C
 CONTACT RESISTANCE: 20M OHM MAX

MATERIAL
 CONTACT: PHOSPHOR BRONZE GOLD PLATED
 BASE: PBT UL94V-0

**SINGLE ROW
RIGHT ANGLE
PS 1800R-**

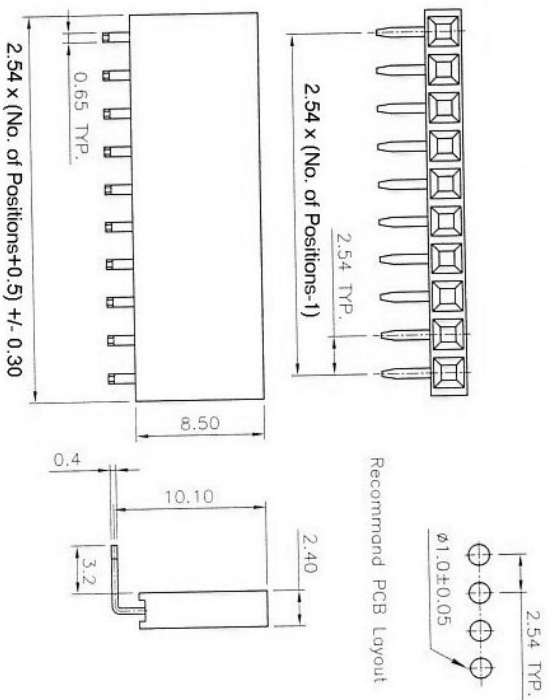

Recommend PCB Layout

PCB SOCKET PITCH=2.54MM SINGLE ROW

DRAWN BY	DESIGNED BY	UNIT	SCALE	TOLERANCE
CHECKED BY	APPROVED BY	mm		+/- 0.2MM
	DATE		VER NO.	
	25 MAR 04			

OWL ELECTRONICS LIMITED

PART NO.

**PS 1800S-
PS 1800R-**